


Dodge Dart 1.4l Intercooler piping instructions

Note: Front bumper removal is not required. We have installed these pipes with the bottom panel removed and also with the front bumper removed.

What's included in the kit?

- Silicone intercooler pipes (both sides)
- 2- 2.5" Guarded clamps
- 2- 2.25" Guarded clamps
- 2- 2.0 Guarded clamps

Once you have the pipe with the ports in place locate the air sensor, and route it with the hose included. We choose to zip tie it nearby.

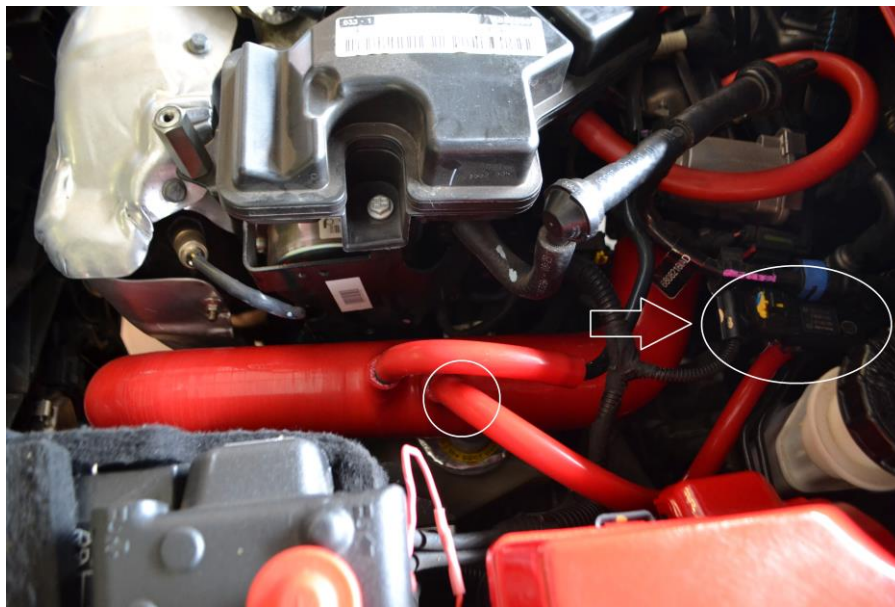

Make sure the intercooler side of the pipe is fully on. They will go over the lip on the opening. (Use soap and water for lubrication!)

The larger sized clamp goes in front of the lip (Towards front of the car), and the smaller size goes behind the lip (Towards back of the car)

Make sure all clamps are fully tightened!

