



EUROCOMPULSION

INSTALLATION

FRONT BRAKE PAD CHANGE


2015+ ALFA ROMEO 4C

05 - Brakes / 05 - Brakes, Base / Hydraulic/Mechanical / PADS, Brake, Front / Removal and Installation


Removal and Installation

REMOVAL


1. Disconnect the negative battery terminal.
2. Remove tire and wheel assembly ([Refer to 22 - Tires and Wheels/Removal and Installation](#)).
3. Disconnect the electrical connection for the pad wear sensor (1) and release the wiring from the retaining clip.

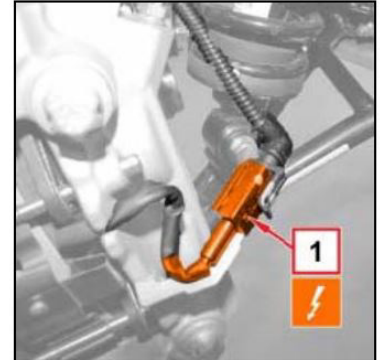

4. Remove the reference pins (1a) and the retaining bracket (1b).

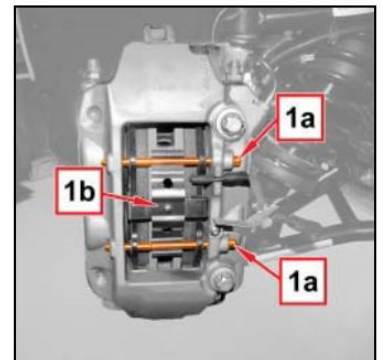

5. Remove the front brake pads.

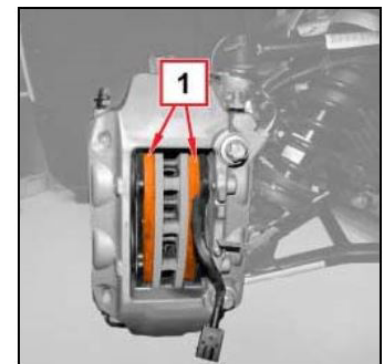

Installation

1. Reposition the front brake pads.
2. Reposition the retaining bracket and the reference pins.
3. Engage the wiring and connect the electrical connection for the brake pad wear sensor.
4. Install tire and wheel assembly ([Refer to 22 - Tires and Wheels/Removal and Installation](#)).
5. Connect the negative battery terminal.
6. Remove the car from the lift.